

GYRON STAB-C COMPACT - SPECS

- | | |
|---|--|
| HELICOPTERS <input checked="" type="checkbox"/> | ■ SILENT IN OPERATION |
| CAMERA CARS <input checked="" type="checkbox"/> | ■ WIRELESS CONTROL OPTION |
| CABLE RIGS <input checked="" type="checkbox"/> | ■ STABILIZED STEERABLE ROLL AXIS |
| CRANES <input checked="" type="checkbox"/> | ■ WILL NOT RADIATE E.M.I. INTO PAYLOAD |
| BOATS <input checked="" type="checkbox"/> | ■ HI-DEF AND FIBRE-OPTIC READY |
| | ■ FULLY STABLE IMAGE AT THE END OF A 500mm FILM LENS |


LIGHT WEIGHT 5 AXIS GYRO-STABILIZED REMOTE HEAD UTILIZING THE LATEST IN GYRO STABILIZATION TECHNOLOGY. FIBRE-OPTIC SLIP RINGS AND E.M.I. PROOF TECHNOLOGY FULLY EQUIP THIS HEAD TO HANDLE TODAY'S MOST SOPHISTICATED DIGITAL AND FILM CAMERAS.

CAMERAS ACCEPTED

- | | |
|--|---|
| PANAVISION <input checked="" type="checkbox"/> | ALL HI-DEF AND BROADCAST VIDEO CAMS <input checked="" type="checkbox"/> |
| ARRIFLEX <input checked="" type="checkbox"/> | RED <input checked="" type="checkbox"/> |
| MOVIECAM <input checked="" type="checkbox"/> | ARRI ALEXA <input checked="" type="checkbox"/> |

SYSTEM SPECS

- | | |
|-----------------------|--|
| ■ Gyro-Stabilization | 5 axis high bandwidth full stabilization |
| ■ Operational Ranges | Type 'A' (Low micro-radian) |
| Pan | 360° continuous □ 120°/sec. |
| Tilt | 123° □ 60°/sec. |
| Roll | +/- 40°max; Steerable or Auto Level □ 60°/sec. |
| ■ System Orientation | Hanging or Sitting |
| ■ Max Lens Stabilized | 25-500mm Film Lens (Standard)
10-1440mm Video Lens (Advanced) |
| ■ Environmental | -22°F to 120°F (-30°C to 45°C) Sealed for Rain |
| ■ Max. Payload Wt. | 55 Lbs. (25Kg.) |
| ■ Max. Payload Size | 11.25"W x 17"H x 34"L (28.6cm x 43cm x 86cm) |
| ■ System Weight | 80 lbs. (36Kg.) |
| ■ Power Requirements | 24-28 VDC (85 watts standby, 420 watts dynamic max) |
| ■ Targeted Tracking | Automatic |
| ■ Back Pan Correction | Automatic/Selectable |
| ■ Operator Controls | Wheels or Joystick |
| ■ Lens Control | Preston FI+Z included |
| ■ Slip Rings | Fiber Optic and Gold Plated |

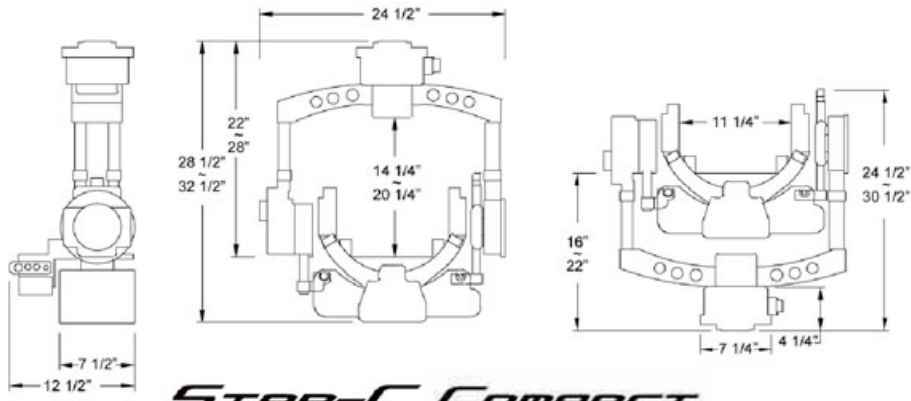

STAB-C COMPACT

Preliminary specs and dimensions; subject to change without notice

